




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38		A1	(11) International Publication Number: WO 99/27740
			(43) International Publication Date: 3 June 1999 (03.06.99)
(21) International Application Number: PCT/SE98/02131 (22) International Filing Date: 24 November 1998 (24.11.98) (30) Priority Data: 08/979,866 26 November 1997 (26.11.97) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: WALLENTIN, Pontus; Mässvägen 2, S-590 71 Ljungsbro (SE). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: MULTISTAGE DIVERSITY HANDLING FOR CDMA MOBILE TELECOMMUNICATIONS

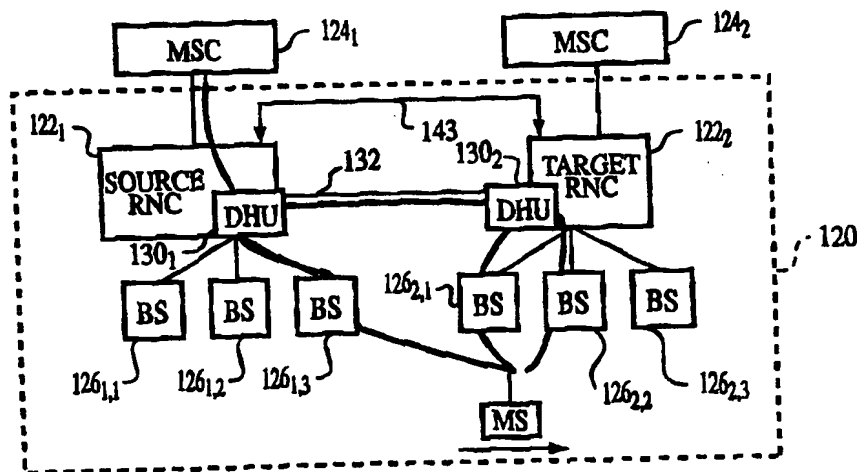

(57) Abstract

In a soft handover cellular system, diversity handling operations are multistaged for a mobile connection which is controlled by an original or Source RNC (122₁) and which also utilizes a secondary or Target RNC (122₂). Non-Source RNCs each have a diversity handling units (DHU) which perform connection splitting and connection combining operations for all involved base stations (BS) owned by the non-Source RNC, so that only one transport connection need exist between the Source RNC and the Target RNC for the mobile connection. The Source RNC (122₁) has a diversity handover unit (130₁) which not only performs connection splitting and connection combining with respect to the involved base stations owned by the Source RNC, but also with respect to the one transport connection for each Target RNC involved in the mobile connection.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

MULTISTAGE DIVERSITY HANDLING FOR CDMA MOBILE TELECOMMUNICATIONS

BACKGROUND

This patent application is related to United States Patent Application SN
5 08/ 980,013 (attorney docket: 2380-4) filed simultaneously, entitled "Diversity
Handling Moveover for CDMA Mobile Telecommunications", which is incorporated
herein by reference.

1. FIELD OF THE INVENTION

In mobile telecommunications, a mobile station such as mobile telephone
10 communicates over radio channels with base stations. Typically a plurality of base
stations are, in turn, ultimately connected to a mobile switching center. The mobile
switching center is usually connected, e.g., via a gateway, to other telecommunication
networks, such as the public switched telephone network.

15 In a code division multiple access (CDMA) mobile telecommunications
system, the information transmitted between a base station and a particular mobile
station is modulated by a mathematical code (such as spreading code) to distinguish it
from information for other mobile stations which are utilizing the same radio frequency.
Thus, in CDMA, the individual radio links are discriminated on the basis of codes.
20 Various aspects of CDMA are set forth in Garg, Vijay K. et al., *Applications of CDMA
in Wireless/Personal Communications*, Prentice Hall (1997).

In addition, in CDMA mobile communications, typically the same baseband signal with suitable spreading is sent from several base stations with overlapping coverage. The mobile terminal can thus receive and use signals from several base stations simultaneously. Moreover, since the radio environment changes rapidly, a mobile station likely has radio channels to several base stations at the same moment, e.g., so that the mobile station can select the best channel and, if necessary, use signals directed to the mobile from various base stations in order to keep radio interference low and capacity high. This utilization of radio channels from multiple base stations by a mobile station in a CDMA scheme is termed "soft handover" or "macro diversity."

Fig. 1 shows a radio access network (RAN) 20 which comprises radio network controllers (RNC) 22₁ and 22₂ respectively connected to mobile switching centers (MSC) 24₁ and 24₂. Radio network controller (RNC) 22₁ is connected to base stations (BS) 26_{1,1}, 26_{1,2}, and 26_{1,3}; radio network controller (RNC) 22₂ is connected to base stations (BS) 26_{2,1}, 26_{2,2}, and 26_{2,3}. At the moment shown in Fig. 1, and for reasons summarized above, mobile station MS is shown in Fig. 1 as having radio communication with two base stations, particularly base stations 26_{1,2} and 26_{1,3}. The lines 28_{1,2} and 28_{1,3} each represent a communication path. Specifically, line 28_{1,2} depicts both the radio channel from mobile station MS to base station BS 26_{1,2} and the land line link channel from base station BS 26_{1,2} to radio network controller (RNC) 22₁; line 28_{1,3} depicts both the radio channel from mobile station MS to base station BS 26_{1,3} and the land line link channel from base station BS 26_{1,3} to radio network controller (RNC) 22₁. In the case of both lines 28_{1,2} and 28_{1,3}, the land line link is connected to a diversity handover unit (DHU) 30₁ of radio network controller (RNC) 22₁.

Thus, as depicted with reference to Fig. 1, the mobile connection with mobile station MS potentially utilizes several "legs", each leg being represented by the

lines 28_{1,2} and 28_{1,3} in the case of mobile station MS of Fig. 1. As the overall connection between mobile station MS and any other party is viewed, the diversity handover unit (DHU) 30₁ serves essentially both to combine and split the different legs utilized by a mobile station. The splitting occurs in the sense that information directed toward the mobile station is directed along the plural parallel legs to differing base stations. Information received from a base station may actually be obtained through several of the legs (e.g., from several base stations), in which sense the diversity handover unit (DHU) 30₁ serves a combining function.

Fig. 1 illustrates the simple case in which the different legs of the connection, represented by lines 28_{1,2} and 28_{1,3}, are for base stations BS all of which are connected to radio network controller (RNC) 22₁. However, should the mobile station MS roam sufficiently to pick up signals from another base station, e.g., into or proximate a cell handled by another base station, such as base station BS 262₁, for example, a more complex situation occurs as shown in Fig. 1A.

In the situation depicted in Fig. 1A, the mobile connection involving mobile station MS employs base stations belonging to differing radio network controllers (RNC). Such situation involves a different type of handover -- an inter-RNC soft handover. Inter-RNC soft-handovers are made between two or several RNCs. In the particular situation shown in Fig. 1A, an inter-RNC soft handover is made between radio network controller (RNC) 22₁, which is also known as the "Source" RNC, and radio network controllers (RNC) 22₂, which is also known as the "Target" RNC. Radio network controller (RNC) 22₁ is the Source RNC since it has current control of the mobile radio connection. The Target RNC is an RNC, other than the Source RNC, that has, or has been decided to have, base stations utilized by the mobile radio connection.

To facilitate, e.g., inter-RNC soft-handovers, the radio network controllers (RNC) 22₁ and 22₂ are connected by an inter-RNC transport link 32. Inter-RNC

transport link 32 is utilized for the transport of control and data signals between Source RNC 22₁ and Target RNC 22₂, and can be either a direct link or a logical link as described, for example, in International Application Number PCT/US94/12419 (International Publication Number WO 95/15665).

5

Thus, in Fig. 1A, the mobile station MS communicates not only through the leg represented by line 28_{1,3}, but now also by the leg represented by line 28_{2,1}. The leg represented by line 28_{2,1} includes the radio link between mobile station MS and base station BS 26_{2,1}, as well as the information pertinent to the mobile connection which is carried over inter-RNC transport link 32.

10

As mobile station MS continues to move, it may eventually occur that all of the base stations utilized by the mobile station are served by the Target RNC 22₂, as is pictured in Fig. 1B. In such case, inter-RNC transport link 32 must carry both legs of the mobile connection, represented by lines 28_{2,1} and 28_{2,2}, respectively. Carrying multiple legs of the same mobile connection undesirably demands further resources from inter-RNC transport link 32. In Fig. 1B, diversity handover unit 30₁ handles all combining and splitting operations, even though no base station owned by Source RNC 22₁ is employed by the mobile connection with mobile station MS.

15
20

For the situation shown in Fig. 1B, resources of inter-RNC transport link 32 can be preserved if the diversity handling operations are moved to Target RNC 22₂. Utilization of inter-RNC transport link 32 would be reduced in that, for example, multiple packets destined in parallel for base stations BS 26_{1,2} and 26_{2,2} need not be carried on link 32, but rather a diversity handover unit at Target RNC 22_{2,2} could instead perform the splitting. A similar economy results in having a diversity handover unit at Target RNC 22_{2,2} combining the signals from mobile station MS as received via the base stations BS 26_{2,1} and 26_{2,2}, and forwarding a resultant signal to Source RNC 22₁.

25

The movement of diversity handling operations (diversity handling “moveover”) to a Target RNC, such as Target RNC 22₂ of Fig. 1B, is a complex endeavor, and can potentially result in an interruption of the established mobile connection. The prior art approach to moving diversity handling operations is shown in International Application Number PCT/US94/12419 (International Publication Number WO 95/15665). That approach, illustrated in Fig. 1C, involves a two step process. The first step of the process is routing the mobile connection, in a bypass mode, through a diversity handling unit (DHU) 30₂ in the Target RNC 22₂ upon first utilization by mobile station MS of the Target RNC (e.g., when a base station served by Target RNC is first invoked). In its bypass mode, diversity handling unit (DHU) 30₂ in the Target RNC 22₂ performs no combining or splitting operations. Rather, all combining and splitting operations remain the province of diversity handling unit (DHU) 30₁ in Source RNC 22.

Only later, when (and if) all base stations utilized by mobile station are owned by the Target RNC 22₂, is the second step of the above-described approach implemented. In the second step, the combining and splitting functions are moved from diversity handover unit (DHU) 30₁ of Source RNC 22₁ to diversity handover unit (DHU) 30₂ of Source RNC 22₂, and diversity handover unit (DHU) 30₁ is bypassed as shown in Fig. 1C. Thus, the control of the mobile connection is essentially transferred to Target RNC 22₂ in accordance with Interface Specification “TIA IS-634/PN-3539 MSC-BS Interface”.

Thus, until the diversity handling operations (e.g., the connection combining and connection splitting operations) are moved to the Target RNC, the situation may exist (as in Fig. 1B, for example) in which two or more legs of a mobile connection require separate transport connections on the inter-RNC link. That is, frames and signaling from more than one base station owned by a Target RNC and involved in the same mobile connection are transported on the inter-RNC link to the

diversity handling unit (DHU) of the Source RNC. Duplication of frames with the same frame number, and hence of same content albeit perhaps different quality, from differing base stations and the signaling associate with those base stations thus increases traffic on the inter-RNC link. Moreover, since diversity handling may never occur, the increased traffic on the inter-RNC link may continue for the duration of the mobile connection.

What is needed therefore, and an object of the invention, is an efficient and economical technique for handling connection combining and connection splitting operations for a multiple-legged mobile connection.

SUMMARY OF THE INVENTION

Diversity handling operations are multistaged for a mobile connection which is controlled by an original or Source RNC and which also utilizes a secondary or Target RNC. Each non-Source RNCs has a diversity handling unit which performs connection splitting and connection combining operations for all involved base stations owned by the non-Source RNC, so that only one transport connection need exist between the Source RNC and the Target RNC for the mobile connection. The Source RNC has a diversity handling unit which not only performs connection splitting and connection combining with respect to the involved base stations owned by the Source RNC, but also with respect to the one transport connection for each Target RNC involved in the mobile connection.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features, and advantages of the invention will be apparent from the following more particular description of preferred embodiments as

illustrated in the accompanying drawings in which reference characters refer to the same parts throughout the various views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

Fig. 1, Fig. 1A, Fig. 1B, and Fig. 1C are each diagrammatic views
5 showing prior art management of a mobile connection for a mobile station moving from base stations owned by a Source radio network controller to base stations controlled by a Target radio network controller.

Fig. 2 is a diagrammatic view of radio area network which utilizes multistage diversity handling according to a mode of the invention.

10 Fig. 3 is a diagrammatic view showing a relationship of Fig. 3A and Fig. 3B.

Fig. 3A is a schematic view showing a Source RNC and base stations managed thereby included in the radio area network of Fig. 2.

15 Fig. 3A is a schematic view showing a Target RNC and base stations managed thereby included in the radio area network of Fig. 2.

Fig. 4 is a schematic view of a sequence of operations according to an mode of the invention.

Fig. 5 is a diagrammatic view of a multistage frame splitting operation according to a mode of the invention.

20 Fig. 6 is a diagrammatic view of a multistage frame combining operation according to a mode of the invention.

Fig. 7 is a diagrammatic view of radio area network which utilizes multistage diversity handling according to a mode of the invention involving more than two stages.

Fig. 8, Fig. 8A, Fig. 8B, and Fig. 8C are diagrammatic view of frames according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE DRAWINGS

In the following description, for purposes of explanation and not limitation, specific details are set forth such as particular architectures, interfaces, techniques, etc. in order to provide a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well known devices, circuits, and methods are omitted so as not to obscure the description of the present invention with unnecessary detail.

15

Fig. 2 shows a radio network area 120 of the present invention which comprises a first set of base stations (BS) 126_{1,1}, 126_{1,2}, and 126_{1,3} connected by land lines to Source radio network controller (RNC) 122₁, and a second set of base stations (BS) 126_{2,1}, 126_{2,2}, and 126_{2,3} connected by land lines to a second radio network controller (RNC) 122₂ which serves as a Target radio network controller. Source RNC 122₁ is connected to mobile switching center 124₁ while Target RNC 122₂ is connected to mobile switching center 124₂. Source RNC 122₁ and Target RNC 122₂ are connected by inter-RNC transport link 132. Inter-RNC transport link 132 can be seen as a logical link, and may be physically switched via other nodes (e.g., other RNCs or MSCs). Source RNC 122₁ and Target RNC 122₂ are considered as control nodes of radio network area 120 in that, among other things, these RNCs control or manage the

25

sets of base stations respectively connected thereto.

As described in more detail herein, for a mobile connection controlled by an original or Source RNC and also utilizing a secondary or Target RNC, diversity handling operations are multistaged. That is, non-Source RNCs have diversity handling units which perform connection splitting and connection combining operations for all involved base stations owned by the non-Source RNC, so that only one transport connection need exist for the mobile connection through the inter-RNC link to the Source RNC. The Source RNC has a diversity handling unit which not only performs connection splitting and connection combining with respect to the involved base stations owned by the Source RNC, but also with respect to the one transport connection for each Target RNC involved in the mobile connection.

As an example, in a downlink scenario involving Source RNC 122₁ and Target RNC 122₂ of Fig. 2, for a mobile connection with mobile station MS, Source diversity handover unit (DHU) 130₁ [also known as a diversity trunk unit] receives frames from mobile switching center 124₁ and applies the frames to base station 126_{1,3} and via inter-RNC link 132 to Target RNC 122₂. In Target RNC 122₂, Target diversity handover unit (DHU) 130₂ obtains the frames and distributes a copy of each frame to each involved base station, i.e., base station (BS) 126_{2,1} and base station (BS) 126_{2,2}.

In the uplink, Target diversity handover unit (DHU) 130₂ receives parallel frames for the mobile connection involving mobile station MS from both base station (BS) 126_{2,1} and base station (BS) 126_{2,2}, selects the best frame of like-numbered frames, and applies the resultant (best) frame to Source diversity handling unit (DHU) 130₁ on inter-RNC link 132. At Source diversity handling unit (DHU) 130₁ the Source diversity handover unit (DHU) 130₁ chooses between the resultant frame forwarded from Target RNC 122₂ and a similarly numbered frame obtained from its own base station, base station (BS) 126_{1,3}. In this manner, transport of duplication

frames and signaling associated therewith on inter-RNC link 132 is eliminated, since transport need not occur with respect to both of base station (BS) 126_{2,1} and base station (BS) 126_{2,2}.

5 Source RNC 122₁ is shown in more detail in Fig. 3A as comprising a switch 140₁. Switch 140₁, which is controlled by RNC control unit 142₁, has a plurality of ports, some of which are connected to diversity handover unit (DHU) 130₁ and others of which are connected to various interfaces. Diversity handover unit (DHU) 130₁ is connected to a timing unit 141₁. The RNC control unit 142₁ is connected to
10 each element of RNC 122₁.

For reasons explained hereinafter, Source RNC 122₁ is connected to a signaling network represented by line 143. Source RNC 122₁ is connected to signaling network 143 via a signaling interface 143I₁. Signaling interface 143I₁ is connected to
15 RNC control unit 142₁.

The interfaces connected to ports of switch 140₁ include MSC interface unit 144₁; RNC interface unit 146₁; and base station interface unit 148₁. MSC interface unit 144₁ is connected to mobile switching center 124₁. RNC interface unit
20 146₁ is connected to inter-RNC transport link 132. Base station interface unit 148₁ is connected to the first set of base stations (BS) served by Source RNC 122₁.

Diversity handover unit (DHU) 130₁ of Source RNC 122₁ primarily comprises DHU controller 160₁; frame splitter 162₁; a set of downlink buffers 164₁₋₁ - 164_{1-n}; a frame selector 166₁; and a set of uplink buffers 168₁₋₁ - 168_{1-n}. Both frame
25 splitter 162₁ and frame selector 166₁ receive timing signals on line 170₁ from timing unit 141₁, and are also connected to DHU controller 160₁.

Frame splitter 162₁ receives (via switch 140₁) frames on line 172₁ from mobile switching center 124₁, while frame selector sends frames on line 174₁ to mobile switching center 124₁. Lines 172₁ and 174₁ are connected to particular ports of switch 140₁ which are internally connectable through switch 140₁ to mobile switching center 124₁.

Frame splitter 162₁ outputs frames received from mobile switching center 124₁ on line 172₁ to each of one of the buffers in set 164 which correspond to a base station currently involved in the mobile connection for the mobile station. Each of the buffers in set 164 is in turn connected to transmit the frames it receives to switch 140₁ over lines 176₁₋₁ - 176_{1-n}. Lines 176₁₋₁ - 176_{1-n} are connected to respective input ports of switch 140₁, which input ports are internally cross connectable (e.g., switchable) through switch 140₁ to the downlink land lines for the respective base stations BS participating in the mobile connection.

15

Frame selector 166₁ receives frames from various ones of the buffers in the set of up-link buffers 168₁ - 168_n. Base stations (BS) participating in a mobile connection send frames to their corresponding up-link buffers 168₁ - 168_n on corresponding ones of lines 178₁ - 178_n. Each of lines 178₁₋₁ - 178_{1-n} is connected to corresponding ports of switch 140₁, with those ports being internally switchable internally through switch 140₁ to up-link land lines from the corresponding base stations (BS). Thus, when plural base stations are involved in a mobile connection, for plural frames representing the same up-linked information (e.g., frames having the same frame number) frame selector 166₁ picks the best frames for transmission (via switch 140₁) to mobile switching center 124₁.

25

As indicated above, DHU controller 160₁ of diversity handover unit (DHU) 130₁ is connected to frame splitter 162₁ and frame selector 166₁, for controlling operations thereof, as well as by line 180₁ to RNC control unit 142₁. RNC control unit

142₁ supervises operation of DHU controller 160₁ and coordinates operations of DHU controller 160₁ with other elements of Source RNC 122₁.

Fig. 3B shows Target RNC 122₂ inclusive of Target diversity handover unit (DHU) 130₂. Target RNC 122₂ of Fig. 3B has essentially the same structure as Source diversity handling unit (DHU) 130₁ of Fig. 3A, and likewise Target diversity handover unit (DHU) 130₂ of Fig. 3B has essentially the same structure as Source diversity handover unit (DHU) 130₁ of Fig. 3A. Therefore, the preceding discussion of Fig. 3A suffices for explanation of the elements and connections of Target RNC 122₂ and its Target diversity handover unit (DHU) 130₂, it being understood that elements of Target RNC 122₂ and Target diversity handover unit (DHU) 130₂ are similarly numerically referenced in Fig. 3B as in Fig. 3A but with differing subscripts (a subscript of "2" referring to Target RNC 122₂ and a subscript of "1" referring to Source diversity handling unit (DHU) 130₁).

Fig. 4 shows a sequence of operations according to an embodiment of the invention. Fig. 4 shows in three separate parallel vertical lines the operations conducted by each of Source RNC 122₁, Target RNC 122₂, and the base stations (BS) served by Target RNC 122₂ and involved in the mobile communication with mobile station MS.

Operation 4-1 of Fig. 4 shows RNC control unit 142₁ of Source RNC 122₁ determining that a new base station not owned by Source RNC 122₁ should be added to the mobile connection for mobile station MS. It will be assumed, in connection with an example illustrative scenario now described, that the mobile connection for mobile station MS thus far involves only base station (BS) 126_{1,3} and base station (BS) 126_{2,1}. That is, the point in time for operation 4-1 for the illustrative example precedes the moment in time shown in Fig. 2, Fig. 3A, and Fig. 3A (e.g., that base station (BS) 126_{2,2} has not yet been added to the connection for mobile station MS. In fact, the determination made at operation 4-1 is that base station (BS) 126_{2,2} now needs to be added to the mobile connection for mobile station MS.

Reflecting the illustrative scenario, Fig. 3A shows Target diversity handover unit (DHU) 130₂ of Source RNC 122₁ handling legs of the mobile connection for mobile station MS with both base station (BS) 126_{1,3} and base station (BS) 126_{2,1}. Line SS-1 of Fig. 3A shows that switch 140₁ is internally cross connected to send frames from MSC I/F unit 144₁ to frame splitter 162₁, from whence copies of the frames are forwarded to base station (BS) 126_{1,3} (as depicted by switch cross connection line SS-3) and to base station (BS) 126_{2,1} (as depicted by switch cross connection line SS-4 in switch 140₁ and cross connection lines TS-1 and TS-3 in switch 140₂ [see Fig. 3B]). The frame selector 166₁ of Source diversity handover unit (DHU) 130₁ receives frames from base station (BS) 126_{3,1} and base station (BS) 126_{2,1}. Frames from base station (BS) 126_{3,1} are applied to frame selector 166₁ via cross connection line SS-5 and from base station (BS) 126_{2,1} via cross connection line SS-6 of switch 140₁ and cross connection lines TS-4 and TS-2 of switch 140₂ [see Fig. 3B]. Frame selector 166₁ of Source diversity handover unit (DHU) 130₁ selects the best of similarly numbered frames from the two legs of the connection, and applies the best frames to mobile switching center 124₁ via cross connection line SS-2 and MSC I/F unit 144₁ [see Fig. 3A].

Returning to operation 4-1, the determination to add base station (BS) 126_{2,2} to the mobile connection for mobile station MS is made by RNC control unit 141₁ of Source RNC 122₁. The determination is based on measurements obtained by mobile station MS and transmitted to Source RNC 122₁

Once the determination to add a new base station BS not owned by another RNC is made at operation 4-1, Source RNC 122₁ checks whether any base station owned by that other RNC is already in use by the mobile connection for mobile station MS. If the mobile connection for mobile station MS does not thus far utilize a base station owned by that other RNC, Source RNC 122₁ allocates a connection on inter-RNC link 132, as depicted by operation 4-2. RNC control unit 142₁ allocates a port of switch 140₁ and a port of RNC interface unit 146₁ to be used by the new connection on inter-RNC link

132 between Target RNC 122₂ and Source RNC 122₁. Further, Source RNC 122₁ then requests its Source diversity handover unit (DHU) 130₁ to listen for any frames from mobile station MS on inter-RNC link 132 and to send frames destined to mobile station MS on inter-RNC link 132 as well as to involved base stations owned by Source RNC
5 122₁.

In the illustrative scenario currently described, a connection on inter-RNC link 132 was previously allocated upon addition of base station (BS) 126_{2,1}, so that operation 4-2 need not be performed in the illustrative scenario.

After the determination has been made to add a new base station now owned by
10 Source RNC 122₁, and regardless of whether the added base station is the first base station involved for another RNC, at operation 4-3 Source RNC 122₁ sends a signaling message to Target RNC 122₂. Signaling messages between RNCs are transmitted over signaling network 143, and can be in accordance with signaling system no. 7, for example. The signaling message sent at operation 4-3 includes a handover setup
15 request. The handover setup request of operation 4-3 instructs Target RNC 122₂ to connect to the base station to be added (e.g., in the illustrative scenario, base station (BS) 126_{2,2}). If the added base station is the first base station owned by Target RNC 122₂ involved in the connection, the handover setup request also includes an identifier for the inter-RNC connection to be used and a connection identifier respecting the
20 mobile station MS. In the case that Target RNC 122₂ is already handling a leg of the connection with mobile station MS, the handover setup request includes the identities of the base stations previously allocated by diversity handling unit (DHU) 140₁ of Source RNC 122₁ and currently in use for the mobile connection with mobile station MS.

In response to the handover setup request message, at operation 4-4 Target RNC
25 122₂ allocates a Target diversity handover unit (DHU) to the mobile connection for mobile station MS in the event that a Target diversity handover unit (DHU) has not yet been allocated for this mobile connection. In the illustrated scenario, Target diversity

handover unit (DHU) 130₂ has already allocated by virtue of previous inclusion of base station (BS) 126_{2,1} in the mobile connection for mobile station MS. Had a Target diversity handover unit (DHU) not yet been allocated, the allocation would be accomplished e.g., by connecting, via switch 140₂, handover unit (DHU) 130₂ to RNC interface unit 146₂. Such connections, previously made in the illustrative scenario, are shown by lines TS-1 and TS-2 in Fig. 3B.

In response to the handover setup request message, at operation 4-4 Target RNC 122₂ allocates a connection to the new base station (i.e., base station (BS) 126_{2,2}) for mobile station MS. Such connections are shown by cross connection lines TS-5 and Ts-6 in Fig. 3B.

After allocation of a connection to base station (BS) 126_{2,2}, at operation 4-6 Target RNC 122₂ sends a connection setup request message to base station (BS) 126_{2,2} over semipermanent connections established at start-up of the base station. The connection setup request instructs base station (BS) 126_{2,2} to activate the transceiver of base station (BS) 126_{2,2} and to connected the transceiver to the indicated RNC-BS connection. When the newly added base station (e.g., base station (BS) 126_{2,2}) provides a connection setup confirmation message (indicated by operation 4-7), Target RNC 122₂ activates Target diversity handover unit (DHU) 130₂ so that Target diversity handover unit (DHU) 130₂ begins actually to process frames (operation 4-8).

Upon activation of Target diversity handover unit (DHU) 130₂, Target RNC 122₂ sends a signaling message to Source RNC 122₁ with a handover setup confirmation message (operation 4-9). Meanwhile, Source RNC 122₁ and Target RNC 122₂ adjust their timing to compensate for any delay differences between (1) the connection involving Source RNC 122₁ and base station (BS) 126_{1,3}, and (2) the connection involving Source RNC 122₁ and Target RNC 122₂. Such timing adjustment is shown as synchronization operation 4-10 in Fig. 4. Synchronization is particularly important when an added base station is the first base station added for a

non-Source RNC for the connection to mobile station MS. Included in operation 4-10 is the newly added base station (e.g., base station (BS) 1262,2) instructing Target diversity handover unit (DHU) 1302 to adjust its sending time if frames arrive too early or too late, and in turn Target diversity handover unit (DHU) 1302 instructs Source diversity handover unit (DHU) 1301 to adjust its sending time. During operation 4-10 frames may be lost if Source diversity handover unit (DHU) 1301 does not have sufficient delay margins. A buffer in Source diversity handover unit (DHU) 1301 for providing sufficient delay margin is therefore preferred at original setup of the mobile connection with mobile station MS. Also included in operation 4-10 is a signaling message from Source RNC 1221 to Target RNC 1222 confirming that synchronization and timing have been adjusted.

When synchronization and timing have been adjusted, at operation 4-11 Source RNC 1221 sends a signaling message with a handover request to mobile station MS. The handover request orders the mobile station MS to use, in addition to existing base stations, the newly added base station (e.g., base station (BS) 1262,2).

Fig. 5 depicts, in simplified form, a multistage frame splitting operation performed using Source RNC 1221 and Target RNC 1222 according to a mode of the invention. Frame splitter 1621 of Source RNC 1221 receives a user traffic frame from mobile switching center 1241 which is to be forwarded to mobile station MS. As shown in more detail in Fig. 3A, Frame splitter 1621 copies the user traffic frame to downlink buffers 1641-1 and 1641-2. Frame splitter 1621 applies a frame number to the two frames (the same frame number to both frames). In this regard, timing unit 1421 supplies Target diversity handover unit (DHU) 1302 with a frame number clock reference.

The two frame copies (frame copy 1 and frame copy 2) are forwarded from downlink buffers 1641-1 and 1641-2 both to base station (BS) 1263,1 and Target RNC 1222. The two frame copies are sent from downlink buffers 1641-1 and 1641-2

according to timing information contained in synchronization adjustment frames received from the other end [see Fig. 8C]. The first frame copy F1 is forwarded to base station (BS) 126_{3,1} using cross connection line SS-3 of switch 140₁; the second frame copy F2 is forwarded to Target RNC 122₂ using cross connection line SS-4 of switch 140₁. Fig. 5 shows the first frame being applied to base station (BS) 126_{3,1} and the second frame copy F2 being applied on intra-RNC link 132 to Target RNC 122₂.

The second frame copy F2 forwarded to Target RNC 122₂ is routed through switch 140₂ as indicated by connection line Ts-1 [see Fig. 3B]. The second frame copy F2 is applied to frame splitter 162₂. Frame splitter 162₂ makes a copy of the second frame for each of downlink buffers 164_{2,1} and 164_{2,2}, with the respective copies (frame copy F2,1 and frame copy F2,2) being sent to base station (BS) 126_{2,1} and base station (BS) 126_{2,2}, respectively. In customary form, frames from each of the three involved base stations are sent to mobile station MS, with mobile station MS selecting the best of same-numbered frames.

Fig. 6 shows, again in simplified form, a multistage frame combining operation performed using Source RNC 122₁ and Target RNC 122₂ according to a mode of the invention. In Fig. 6, mobile station MS sends the same frame to each involved base station, e.g., base station (BS) 126_{1,3}; base station (BS) 126_{2,1}, and base station (BS) 126_{2,2}. In Fig. 6, the frame F2,1 received at base station (BS) 126_{2,1} is connected through switch 140₂ (see connection line TS-4 in Fig. 3B) to uplink buffer 168_{2,1}. Similarly, the frame F2,2 received at base station (BS) 126_{2,2} is connected through switch 140₂ (see connection line TS-5 in Fig. 3B) to uplink buffer 168_{2,2}. The frame F1 received at base station (BS) 126_{1,3} is connected through switch 140₁ (see connection line SS-5 in Fig. 3A) to uplink buffer 168_{1,1}.

Using a quality indicator in two copies of the same-numbered frames (frame F2,1 and frame F2,2), frame selector 166₂ determines the "best" of the two frame copies. More specifically, upon obtaining a frame with a new frame number,

Target diversity handover unit (DHU) 130₂ stores the first frame with the new frame number in the appropriate one of the uplink buffers 168 and awaits, for a specified time interval, arrival of other frames with the same frame number. Upon completion of the specified time interval, frame selector 166₂ selects the best frame. Any later arriving frames of the same frame number are discarded. Accordingly, Fig. 6 shows Target diversity handover unit (DHU) 130₂ of Target RNC 122₂ forwarding one resultant frame (in this illustration, frame F2,1) on inter-RNC link 132 to Source RNC 122₁.

Frame F2,1 applied on inter-RNC link 132 to Source RNC 122₁ is routed through switch 140₁ on connection line SS-5 as shown in Fig. 3A to uplink buffer 168₁₋₁. The resultant frame obtained from Target diversity handover unit (DHU) 130₂ of Target RNC 122₂ is routed through switch 140₁ (see connection SS-6 in Fig. 3A) and is stored in uplink buffer 168₁₋₂. With frame selector 166₁ having both frame F1,3 and frame F2,1 in its set of uplink buffers 168, frame selector 166₁ makes a determination of "best" frame in much the same manner as did frame selector 166₂ of Target RNC 122₂. Frame selector 166₁ forwards the user traffic part of the "best" frame (e.g., frame F2,1 in the example of Fig. 6) to MSC 124₁. The user traffic part of the "best" frame is routed through switch 140₁ on connection line SS-2 as shown in Fig. 3A.

Thus, the both frame splitting and frame combining operations of the present invention are multistaged. In particular, in the situation shown in Fig. 2, Fig. 3A, Fig. 3B, Fig. 5, and Fig. 6, for example, Source diversity handover unit (DHU) 130₁ of Source RNC 122₁ performs a first stage of frame splitting while Target diversity handover unit (DHU) 130₂ of Target RNC 122₂ performs a second stage of frame splitting. Conversely, for frame directed from mobile station MS to MSC 124₁, Target diversity handover unit (DHU) 130₂ performs a second stage of frame combining and Source diversity handover unit (DHU) 130₁ of Source RNC 122₁ performs a first stage of frame combining.

In the frame combining and frame splitting operation, each the DHU controller of each diversity handover unit (DHU) is supervised by the RNC control unit of the respective RNC node. For example, the RNC control unit instructs its corresponding DHU controller as to which ports of its corresponding switch the diversity handover unit (DHU) shall be connected for reception and transmission of information streams (e.g., frames).

In the foregoing reference has been made to various types of frames, including user traffic frames and synchronization frames. Fig. 8, Fig. 8A, Fig. 8B, and Fig. 8C are diagrammatic view of types of frames utilized according to an embodiment of the invention. Examples of traffic frame formats are shown in Fig. 8 and Fig. 8A. Fig. 8 particularly shows an uplink traffic frame which has a frame type field 8-1; a frame number field 8-2; a quality indicator field 8-3; and, a user traffic data field 8-4. Fig. 8A shows a downlink traffic frame which has a frame type field 8A-1; a frame number field 8A-2; and, a user traffic data field 8A-4.

An example of contents of the quality indicator fields 8-3 and 8-4 is a received signal-to-noise ratio (SIR) for the frame. In addition, a checksum result for the frame could be included in the quality indicator fields 8-3 and 8-4. The quality indicator is used by the frame selector in the diversity handover unit (DHU) to select and forward (to the appropriate mobile switching center MSC) the user traffic data of the best frame, of all of the frames received with a given frame number from all base stations involved for the connection with mobile station MS. The frame splitter, on the other hand, copies the user traffic data to all base stations involved in the connection for mobile station MS, and attaches the frame number for field 8A-2 [see Fig. 8A]. The timing unit (e.g., timing unit 1411) supplies the diversity handover unit (DHU) with a frame number and with a frame number clock reference.

A dummy frame, an example of which is illustrated in Fig. 8B, can be used for establishment of communication and synchronization when no real traffic is to

be sent. The example dummy frame of Fig. 8B includes a frame type field 8B-1 and a dummy data field 8B-4.

A synchronization frame, such as that shown in Fig. 8C, is employed to carry synchronization adjustment values. The example of the synchronization frame shown in Fig. 8C includes a frame type field 8C-1 and an adjustment value data field 8C-4. In one mode of the invention, the adjustment value data field 8C-4 contains a positive or negative time offset value.

Fig. 7 shows a radio area network 720 which utilizes multistage diversity handling involving more than two stages. In particular, in addition to Source RNC 122₁ and Target RNC 122₂ as above discussed, radio area network 720 includes RNC 122₃. In the uplink in Fig. 7, diversity handover unit (DHU) 130₃ of RNC 122₃ combines frames received from base station (BS) 126_{3,1} and base station (BS) 126_{3,2}, both of which are included in respective legs of the mobile connection with mobile station MS. For each same-numbered frame received by diversity handover unit (DHU) 130₃, one resultant (e.g., "best") frame is forwarded on inter-RNC link 132' to Target RNC 122₂. The resultant frame applied on inter-RNC link 132' is connected through switch 140₂ to Target diversity handover unit (DHU) 130₂. Target diversity handover unit (DHU) 130₂ makes a second stage selection from between the resultant frame after making a selection of a best frame from base station (BS) 126_{2,1} and base station (BS) 126_{2,2}, and the frames received from each of base station (BS) 126_{2,1} and base station (BS) 126_{2,2}. The resultant frame from the second stage combination performed by Target diversity handover unit (DHU) 130₂ is forwarded on inter-RNC link 132 to Source RNC 122₁. Target diversity handover unit (DHU) 130₂ of Source RNC 122₁ then performs a first stage combination by selecting one of the frame received from base station (BS) 126_{1,3} and the second stage resultant frame received on inter-RNC link 132. The first stage resultant frame is then forwarded to MSC 124₁.

In the downlink, a frame from MSC 124₁ is applied through switch 140₁ to Target diversity handover unit (DHU) 130₂, which performs a first stage split and sends a frame copy to base station (BS) 126_{3,1} and a frame copy on inter-RNC link 132 to Target RNC 122₂. The frame copy sent to Target RNC 122₂ is routed through
5 switch 140₂ to Target diversity handover unit (DHU) 130₂, which performs a second stage split of the frame. In the second stage split, copies of the frame are sent to each of base station (BS) 126_{2,1}, base station (BS) 126_{2,2}, and RNC 122₃ (via inter-RNC link 132'). RNC 122₃ performs a third stage split by sending copies of the frame to base station (BS) 126_{3,1} and base station (BS) 126_{3,2}. Thus, in the Fig. 7 illustration,
10 mobile station MS receives five copies of the same frame, and selects the best frame for utilization.

In view of the foregoing, it should be understood that numerous differently staged configurations are within the purview of the present invention, including greater number of stages and stages being treed in differing configurations.
15 For example, RNC 122₃ of Fig. 7 could be connected by an inter-RNC link to Source RNC 122₁ instead of Target RNC 122₂, in which case a two stage configuration would exist with Source diversity handover unit (DHU) 130₁ applying copies to three members of the second stage (e.g., base station (BS) 126_{1,3}, Target RNC 122₂, and RNC 122₃).

20 In connection with the foregoing, one mobile connection, specifically the mobile connection for mobile station MS has been discussed. Connections for other mobile stations are likely being handled by each of the RNCs, which typically involves use of the same or other diversity handover units (DHUs) within those RNCs.

In the embodiments described herein, for sake of simplicity only a limited
25 number of base stations (BS) have been shown as connected to each RNC. It should be understood that differing and greater numbers of base stations can be connected to each

RNC, and accordingly that the number of downlink and uplink buffers in each diversity handover unit (DHU) is dependent thereon.

In the foregoing discussion, MSC I/F unit 144 and RNC I/F unit 146 have been illustrated as separate interfaces. It should be understood, however, that these
5 interfaces can be combined into a single transport network interface unit.

In the embodiments herein illustrated, the connection between Source diversity handling unit (DHU) 130₁ and Target diversity handover unit (DHU) 130₂ has been shown as a direct link. It should also be understood that the connection between Source diversity handling unit (DHU) 130₁ and Target diversity handover unit (DHU)
10 130₂ can instead be switched via any intermediate node. For example, in an embodiment in which such connection is switched, the intermediate node can be an MSC, an RNC, or a node in the public switched telephone network (PSTN).

It should be noted that the Source DHT (e.g., the DHT that does the
15 second stage of the combining/splitting) can be moved. An example of a preferred embodiment of DHT moveover is described in United States Patent Application SN 08/980,013 (attorney docket: 2380-4) filed simultaneously, entitled "Diversity Handling Moveover for CDMA Mobile Telecommunications", which is incorporated herein by reference.

20 Advantageously, in accordance with the present invention each inter-RNC link requires only one transport connection for a non-source RNC. This is because the upstage or Source diversity handover unit (DHU) sends only one copy to a Target RNC 122₂, with the Target diversity handover unit (DHU) 130₂ of the Target RNC 122₂ performing splitting operations for the base stations which it owns. Conversely, on the
25 uplink, the downstage or Target diversity handover unit (DHU) 130₂ sends only one resultant frame on the inter-RNC link to Source RNC 122₁, the Target diversity

handover unit (DHU) 130₂ having performed a combining operation with respect to all base stations owned by Target RNC 122₂.

5 While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiment, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1 1. A mobile telecommunications system comprising:

2 a first control node serving a first set of base stations, the first control
3 node performing one of a first stage connection combining operation and a first stage
4 connection splitting operation with respect to a mobile connection; and

5 a second control node serving a second set of base stations, the second
6 control node performing one of a second stage connection combining and a second
7 stage connection splitting operations with respect to the mobile connection.

1 2. The system of claim 1, wherein the second control mode combines same-
2 numbered frames from a plurality of base stations of the second set to yield a resultant
3 frame, and wherein the first control mode combines the resultant frame with a same-
4 numbered frame from at least one of the base stations of the first set.

1 3. The system of claim 1, wherein the first control mode forwards copies of the
2 frame received from a mobile switching center to at least one of the base stations of the
3 first set and a single copy of the frame to the second control node, and wherein the
4 second control mode forwards copies of the frame received from the first control node
5 to a plurality of base stations of the second set.

1 4. A method of operating a mobile telecommunications system, the method
2 comprising:
3 performing one of a first stage connection combining operation and a first
4 stage connection splitting operation at a first control node, the first control node serving
5 a first set of base stations; and
6 performing one of a second stage connection combining operation and a
7 second stage connection splitting operation at a second control node, the second control
8 node serving a second set of base stations.

1 5. The method of claim 4, wherein the performing of the second stage
2 connection combining operation comprises the second control node combining same-
3 numbered frames from a plurality of base stations of the second set to yield a resultant
4 frame, and wherein the performing of the first stage connection combining operation
5 comprises first control node combining the resultant frame with a same-numbered
6 frame from at least one of the base stations of the first set.

1 6. The method of claim 4, the performing of the first stage connection splitting
2 operation comprises the first control node forwarding copies of the frame received from
3 a mobile switching center to at least one of the base stations of the first set and a single
4 copy of the frame to the second control node, and wherein the performing of the second
5 stage connection splitting operation comprises the second control node forwarding
6 copies of the frame received from the first control node to a plurality of base stations of
7 the second set.



1 7. A mobile telecommunications system comprising:
2 a first control node serving a first base station, the first control node having a
3 diversity handling unit;
4 a second control node serving a second base station, the first control node having
5 a diversity handling unit;
6 wherein when particular mobile connection involves the first base station and the
7 second base station, both the diversity handling unit of the first control node and the
8 diversity handling unit of the second control node are utilized for the particular mobile
9 connection.

1 8. A method of operating a mobile telecommunications system, the method
2 comprising:



3 establishing a particular mobile connection with a mobile station using a first
4 base station and a second base station, the first base station and the second base station
5 being respectively controlled by a first control node and a second control node;
6 utilizing a first diversity handling unit in the first control node and a second
7 diversity handling unit in the second control node for performing combining and
8 splitting functions for the particular mobile connection.

1 9. The method of claim 8, wherein initially one of the first control node and the
2 second control node performs a first stage combining and splitting function and the
3 other of the first control node and the second control node performs a second stage
4 combining and splitting function, and wherein the method further comprises moving the
5 second stage splitting and combining function to a control node other than the control
6 node which initially performed the second stage combining and splitting function.

1/9

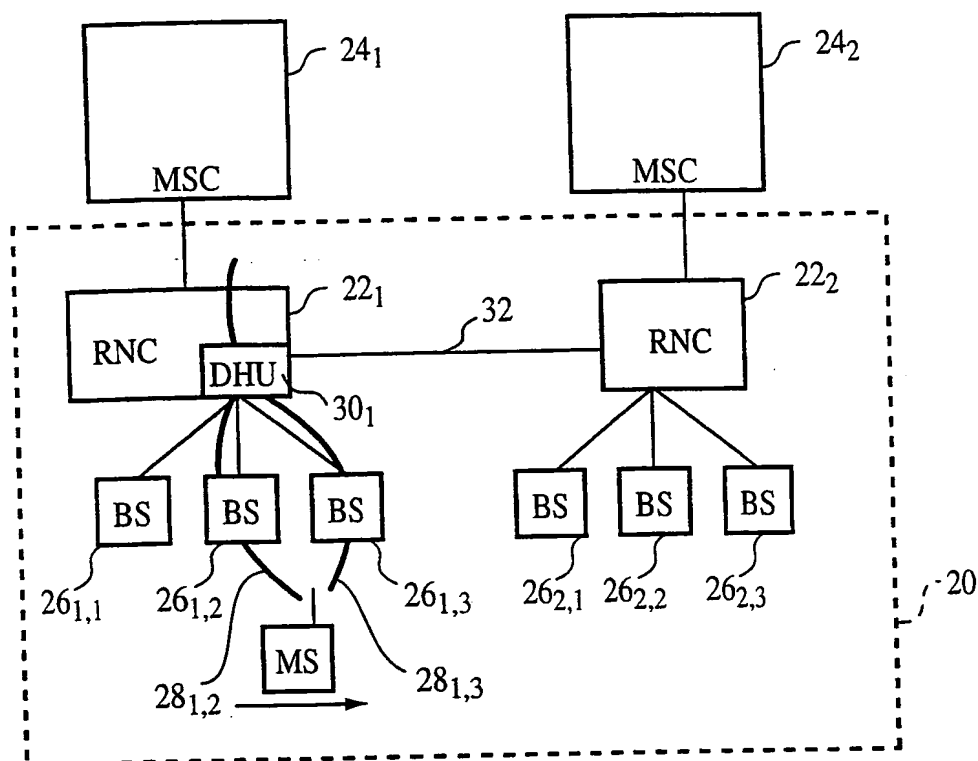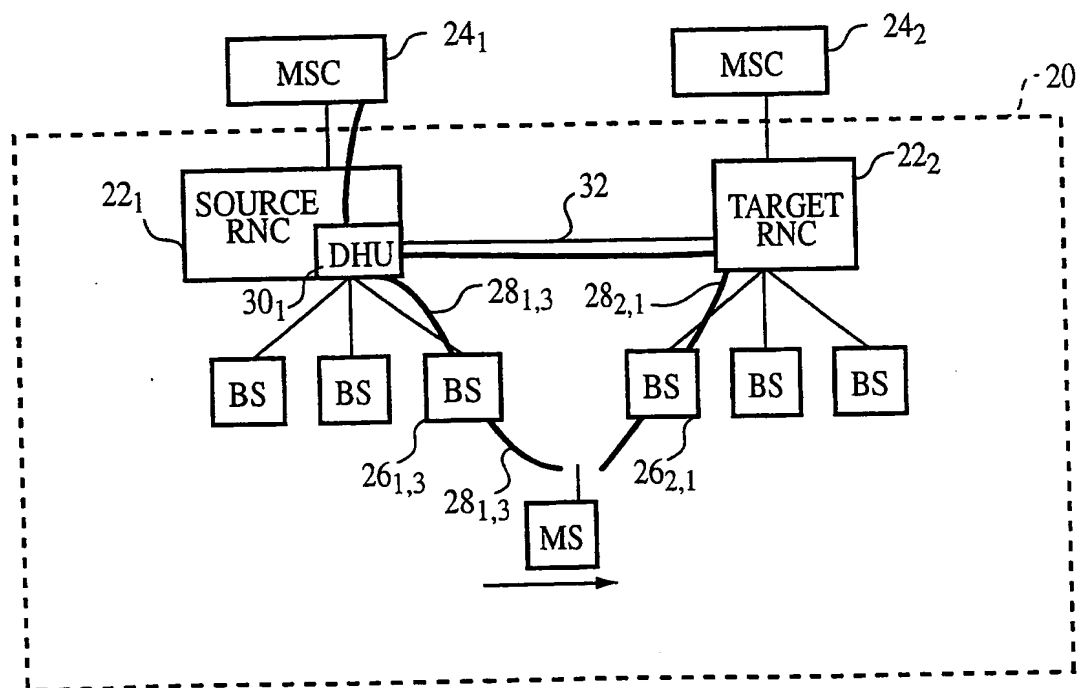FIG. 1
PRIOR ARTFIG. 1A
PRIOR ART

2/9

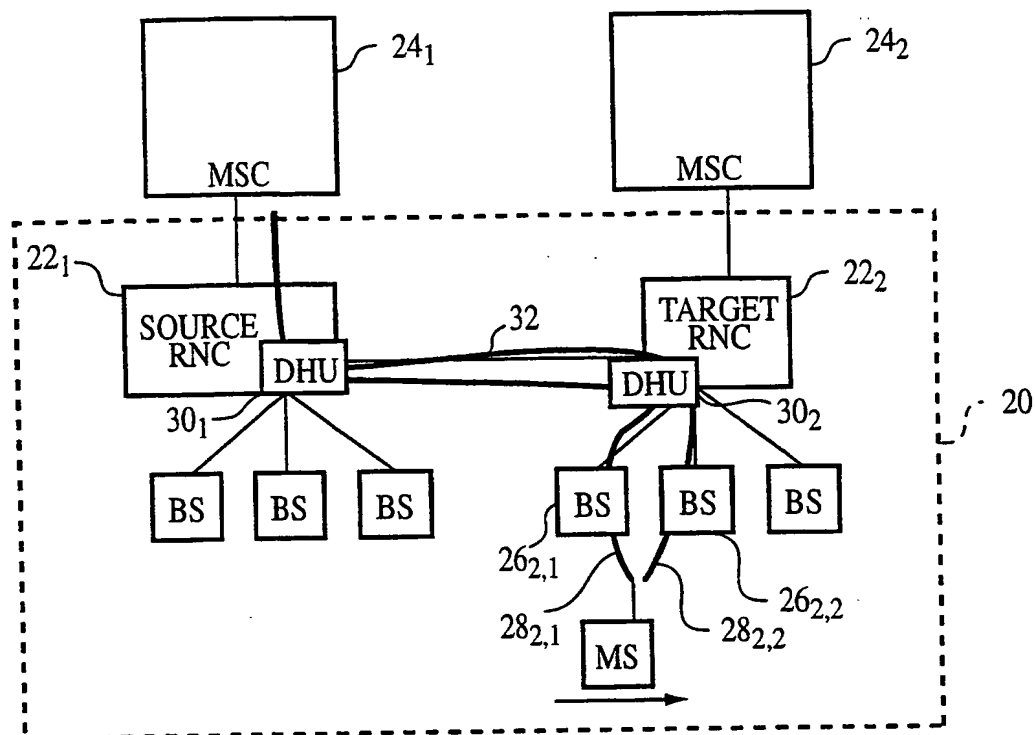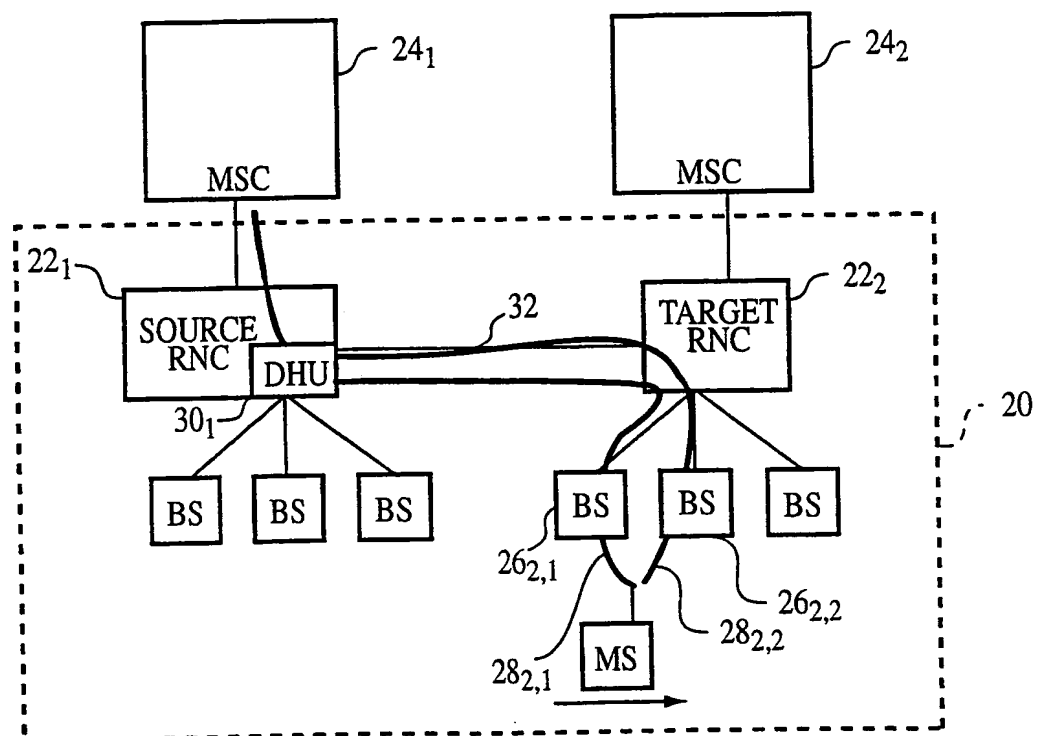FIG. 1C
PRIOR ARTFIG. 1B
PRIOR ART

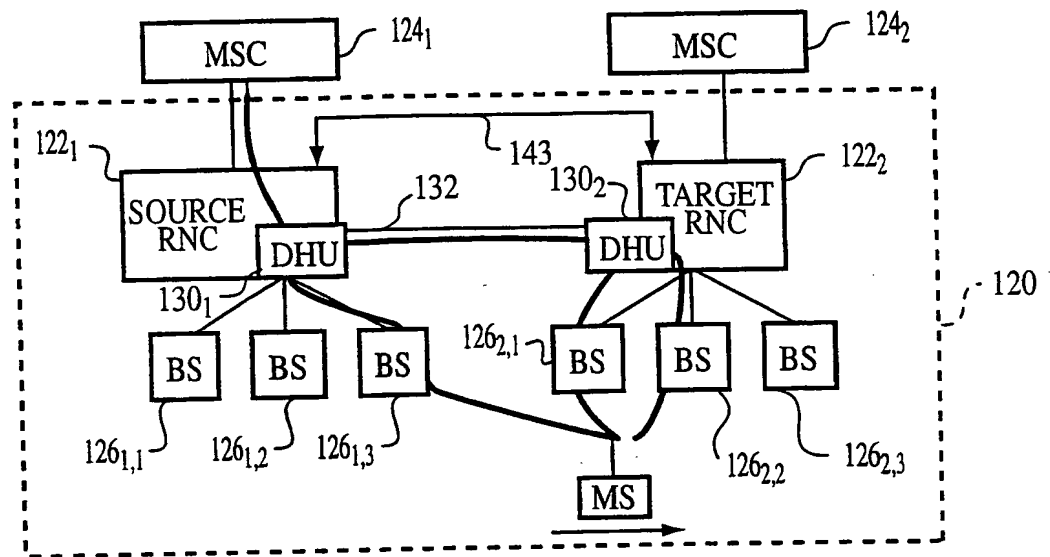


FIG. 2




FIG. 3

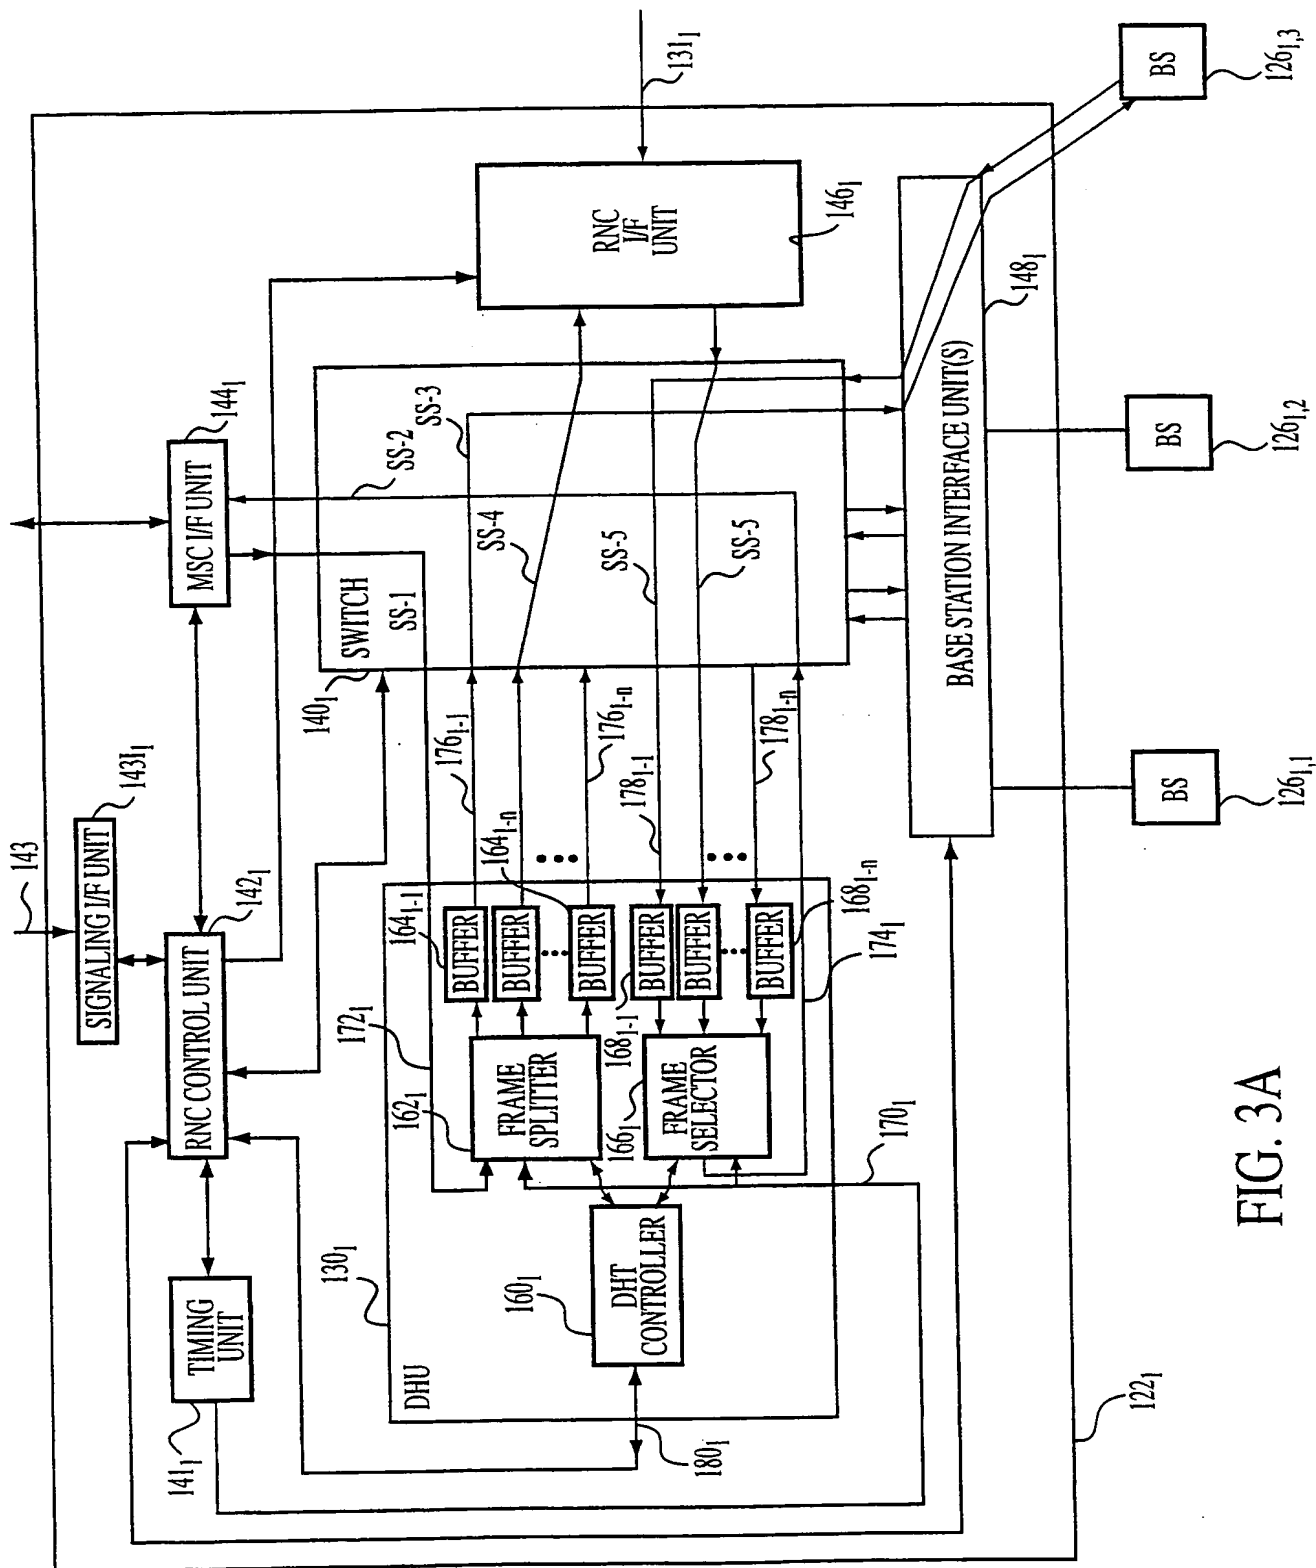


FIG. 3A

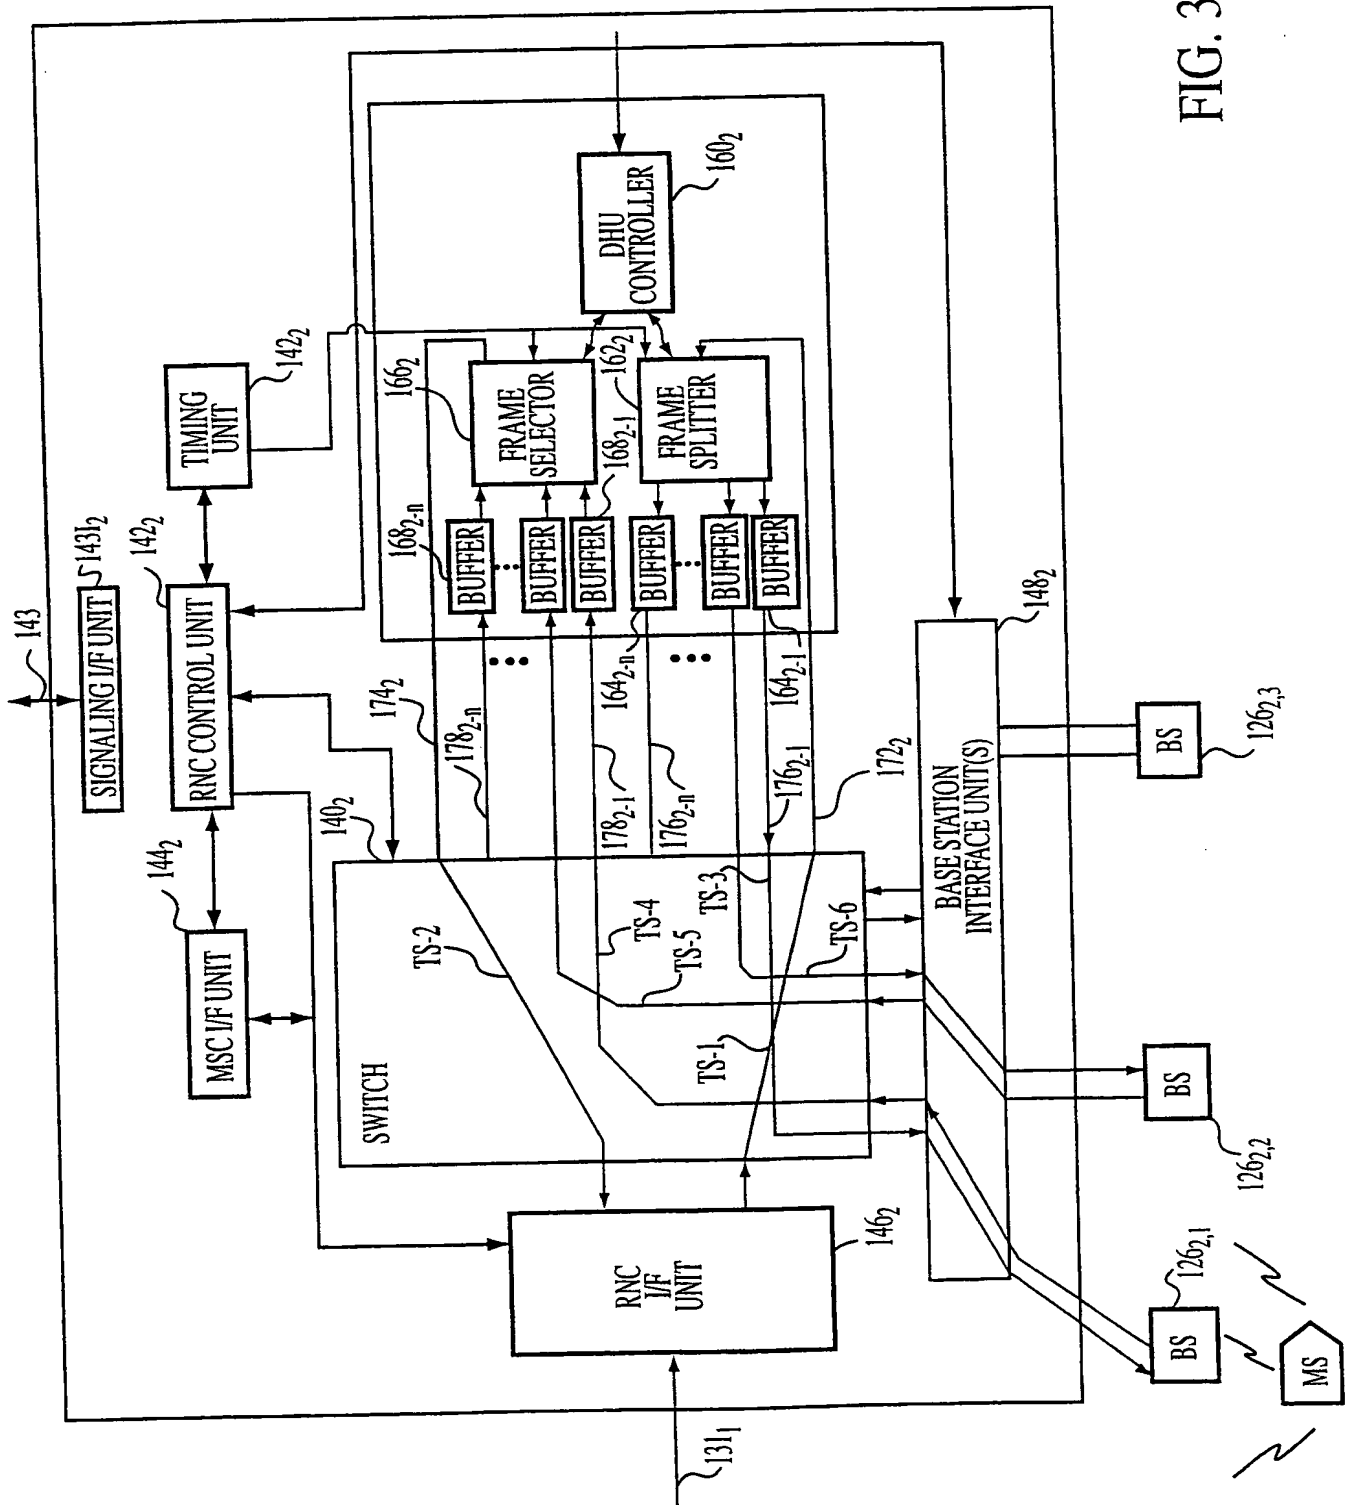


FIG. 3B

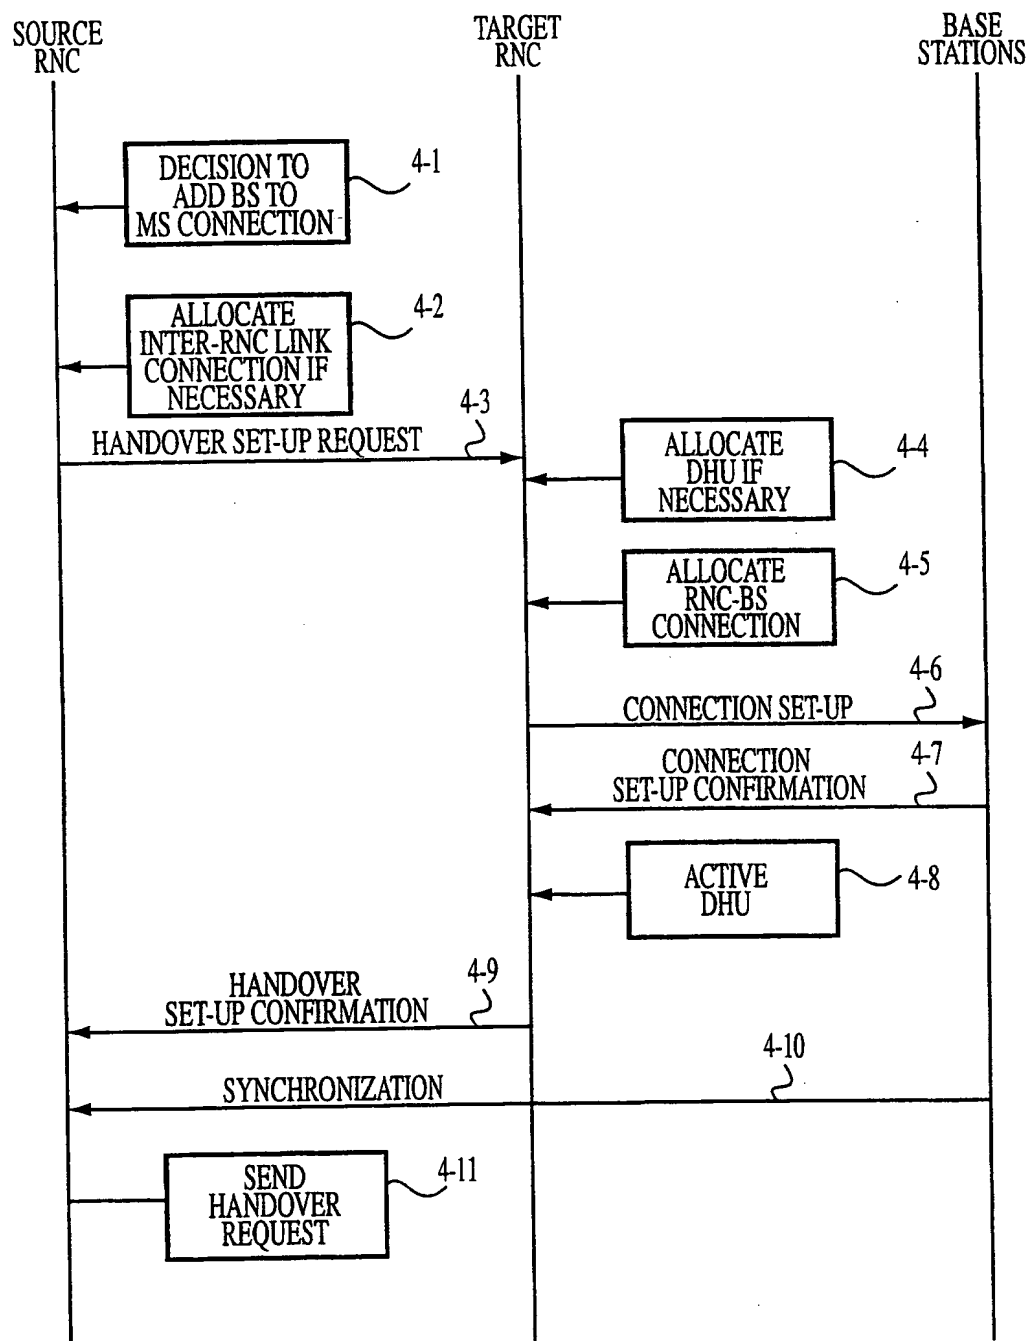


FIG. 4

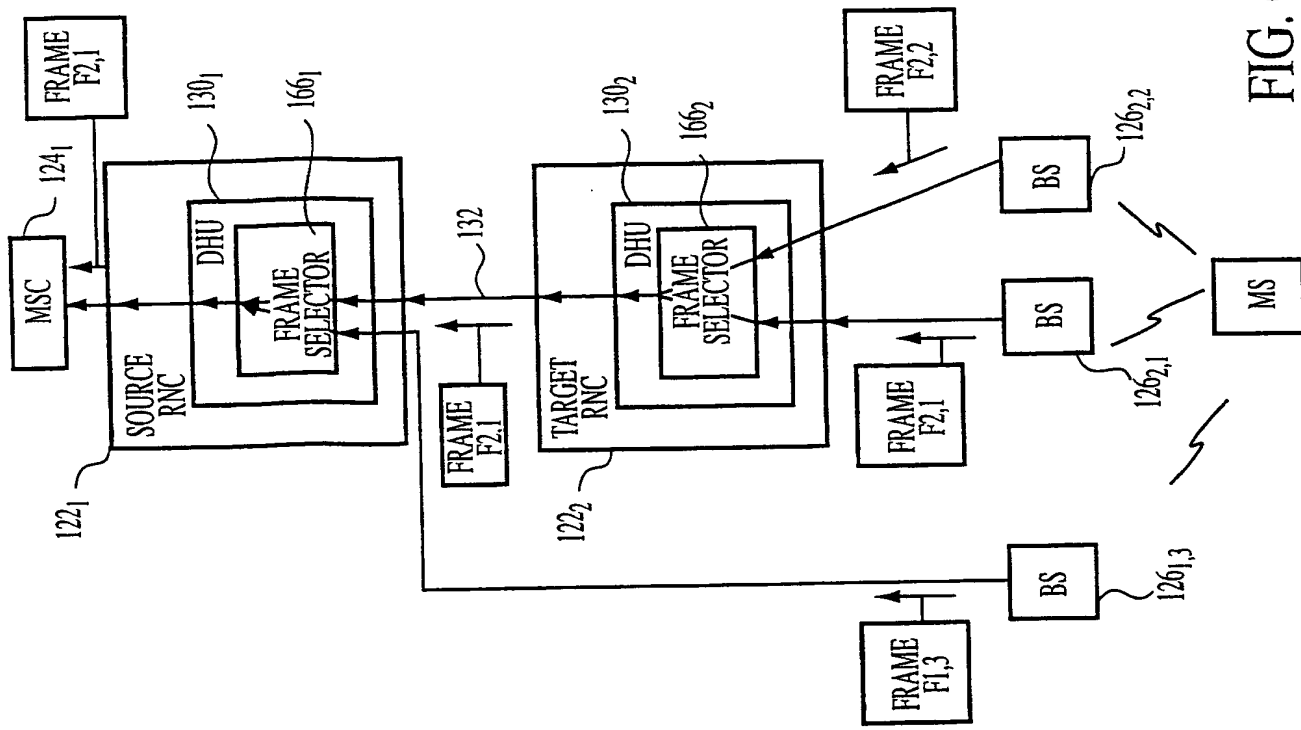


FIG. 6

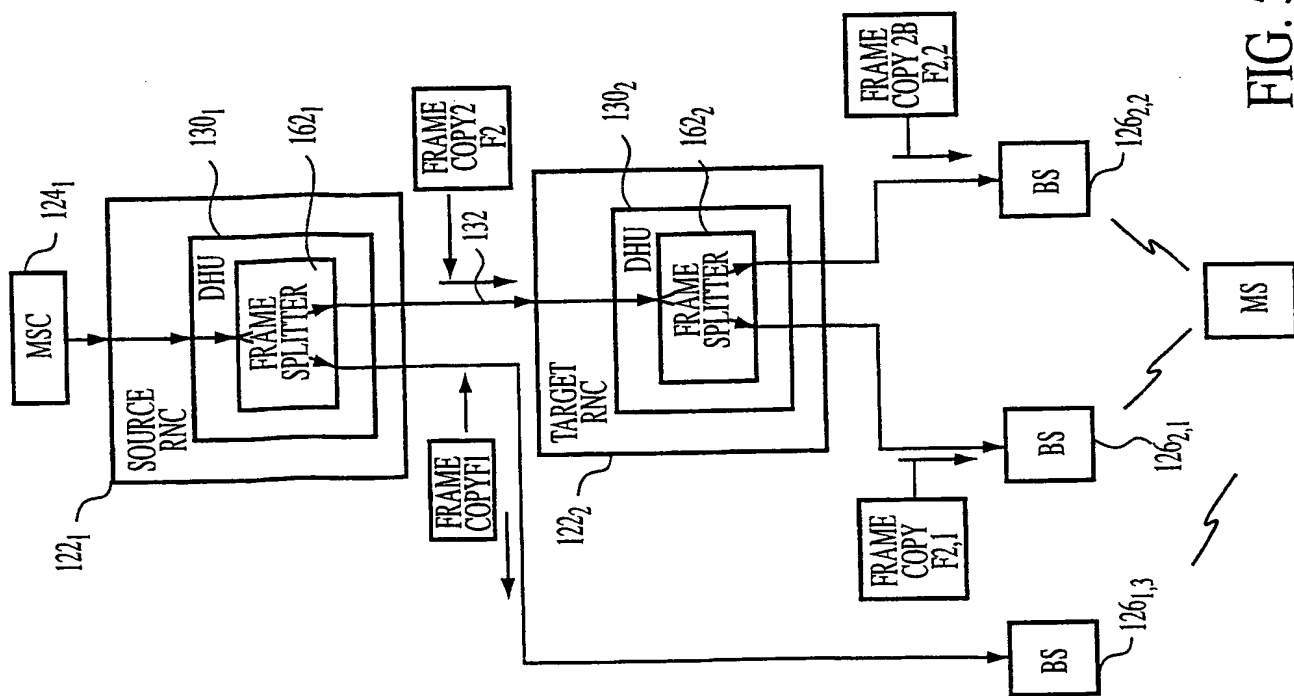


FIG. 5

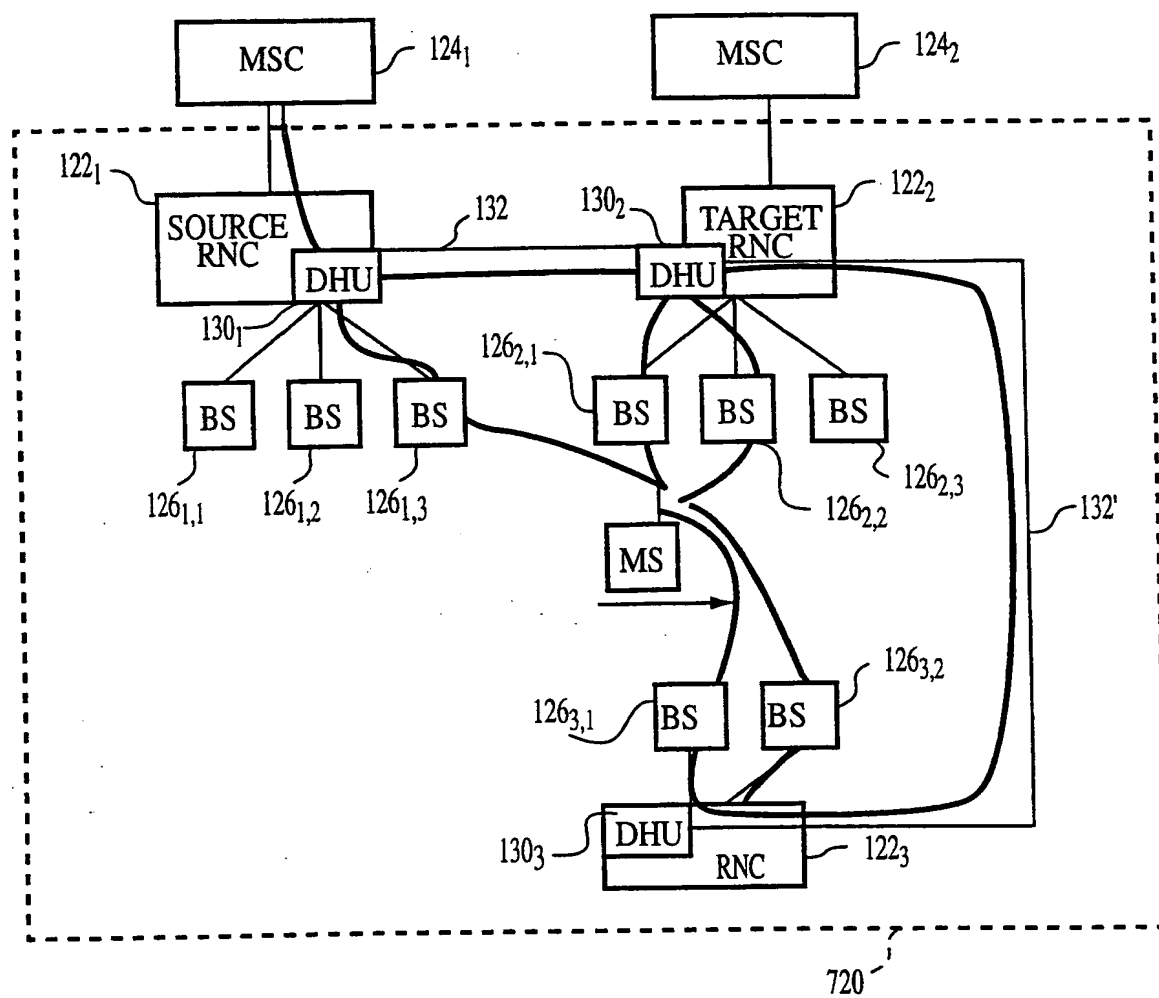


FIG. 7

9/9

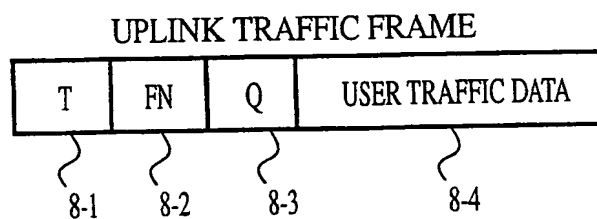


FIG. 8

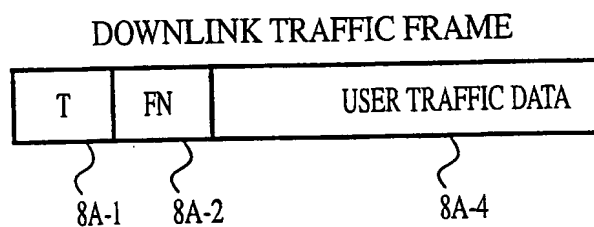


FIG. 8A

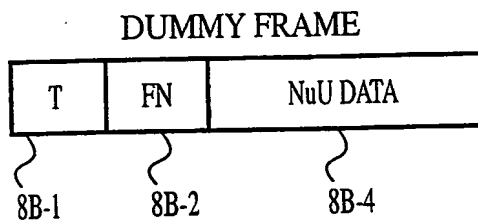


FIG. 8B

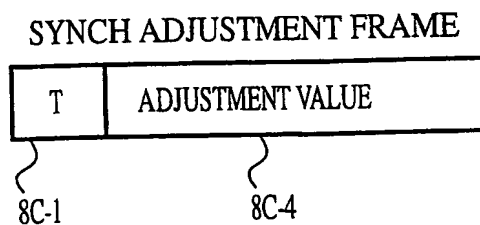


FIG. 8C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/02131

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 23098 A (SIEMENS AG ;HAFERBECK RALF (DE); ERNST DETLEF (DE)) 26 June 1997 see page 1, line 24 - page 2, line 21 see page 5, line 1 - page 7, line 12 see page 7, line 25 - page 9, line 2; figure 2 ---	1-8
X	WO 95 04420 A (BRITISH TELECOMM ;CULLEN JOHN MICHAEL (GB)) 9 February 1995 see page 4, line 32 - page 6, line 9; figure 1 ---	1-8
X	EP 0 679 042 A (ROKE MANOR RESEARCH) 25 October 1995 see column 6, line 14 - column 7, line 46; figures 5,6 --- -/--	1-8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

5 March 1999

Date of mailing of the international search report

17/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Baas, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/02131

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 08897 A (NOKIA TELECOMMUNICATIONS OY ;MUSZYNSKI PETER (FI)) 30 March 1995 see page 16, line 20 - page 17, line 32; figure 1 -----	1-9
A	WO 97 41698 A (QUALCOMM INC) 6 November 1997 see page 8, line 22 - page 9, line 28 see page 11, line 3 - page 13, line 19 -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/02131

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9723098 A	26-06-1997	DE 19547467 C EP 0868823 A	03-07-1997 07-10-1998
WO 9504420 A	09-02-1995	AU 680527 B AU 7269994 A CA 2166547 A CN 1128095 A EP 0711484 A FI 960388 A JP 9501027 T NZ 269202 A SG 47538 A	31-07-1997 28-02-1995 09-02-1995 31-07-1996 15-05-1996 29-01-1996 28-01-1997 27-08-1996 17-04-1998
EP 0679042 A	25-10-1995	GB 2288950 A FI 951920 A	01-11-1995 24-10-1995
WO 9508897 A	30-03-1995	AU 681595 B AU 4820993 A EP 0720803 A FI 961313 A JP 9505948 T NO 961194 A	04-09-1997 10-04-1995 10-07-1996 21-05-1996 10-06-1997 22-05-1996
WO 9741698 A	06-11-1997	AU 2823597 A CA 2253379 A EP 0896778 A	19-11-1997 06-11-1997 17-02-1999